

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets

(11) Veröffentlichungsnummer:

(11) Publication number:

(11) Numéro de publication:

**EP 1 556 984 A0**

Internationale Anmeldung veröffentlicht durch die  
Weltorganisation für geistiges Eigentum unter der Nummer:

**WO 2004/038989** (art. 158 des EPÜ).

International application published by the World  
Intellectual Property Organisation under number:

**WO 2004/038989** (art. 158 of the EPC).

Demande internationale publiée par l'Organisation  
Mondiale de la Propriété sous le numéro:

**WO 2004/038989** (art. 158 de la CBE).

## DATA DETECTION AND DEMODULATION FOR WIRELESS COMMUNICATION SYSTEMS

**Publication number:** EP1556984 (A2)

**Publication date:** 2005-07-27

**Inventor(s):** WALTON J RODNEY [US]; WALLACE MARK S [US] +

**Applicant(s):** QUALCOMM INC [US] +

**Classification:**

- **international:** **H04B7/08; H04L1/00; H04L1/06; H04L1/08; H04L25/02; H04L25/03; H04L27/00; H04L27/26; H04B7/005; H04B7/06; H04L1/16; H04W28/20; H04W52/50; H04B7/08; H04L1/00; H04L1/02; H04L1/08; H04L25/02; H04L25/03; H04L27/00; H04L27/26; H04B7/005; H04B7/04; H04L1/16; H04W28/16; H04W52/00; (IPC1-7): H04L1/06; H04L27/00; H04L27/26**

- **European:** H04B7/08C4J2; H04L1/00A8Q; H04L25/02C11A; H04L25/03B9; H04L27/00M; H04L27/26M1; H04L27/26M1R; H04L27/26M5

**Application number:** EP20030779427 20031024

**Priority number(s):** WO2003US34568 20031024; US20020421309P 20021025; US20020432626P 20021210; US20030692833 20031023

### Also published as:

WO2004038989 (A2)  
WO2004038989 (A3)  
MXPA05004311 (A)  
KR20050071576 (A)  
JP2010213309 (A)

more >>


### Cited documents:

EP0772329 (A1)  
EP0895387 (A1)  
US6314113 (B1)  
US5959965 (A)  
JP11205273 (A)

Abstract not available for EP 1556984 (A2)

Abstract of corresponding document: **WO 2004038989 (A2)**

Techniques for detecting and demodulating data transmissions in wireless communication systems. In one aspect, a decision-directed detector detects for data transmissions in a received signal by utilizing received data symbols as well as received pilot symbols. The decision-directed detector may be designed to perform differential detection in the frequency domain or coherent detection in the time domain, and may be used with multi-carrier modulation (e.g., OFDM). In another aspect, an adaptive threshold is used to perform detection of received data transmissions. A threshold may be determined for each data transmission hypothesized to have been received. The threshold may be computed, for example, based on the signal plus noise energy of the hypothesized data transmission.

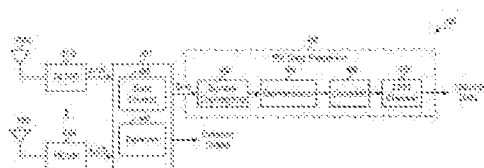

Data supplied from the **espacenet** database — Worldwide